


BOM:

- 1) 3/8" NPT MALE SS 304 FITTING
- 2) 304 SS TUBING 1.00 OD
- 3) 1/4" NPT MALE SS 316 FITTING
- 4) HEATER FLANGE LASER WELDED TO ITEM 2
- 5) 4X 36" FIBERGLASS LEADS FOR POWER AND TYPE K T/C

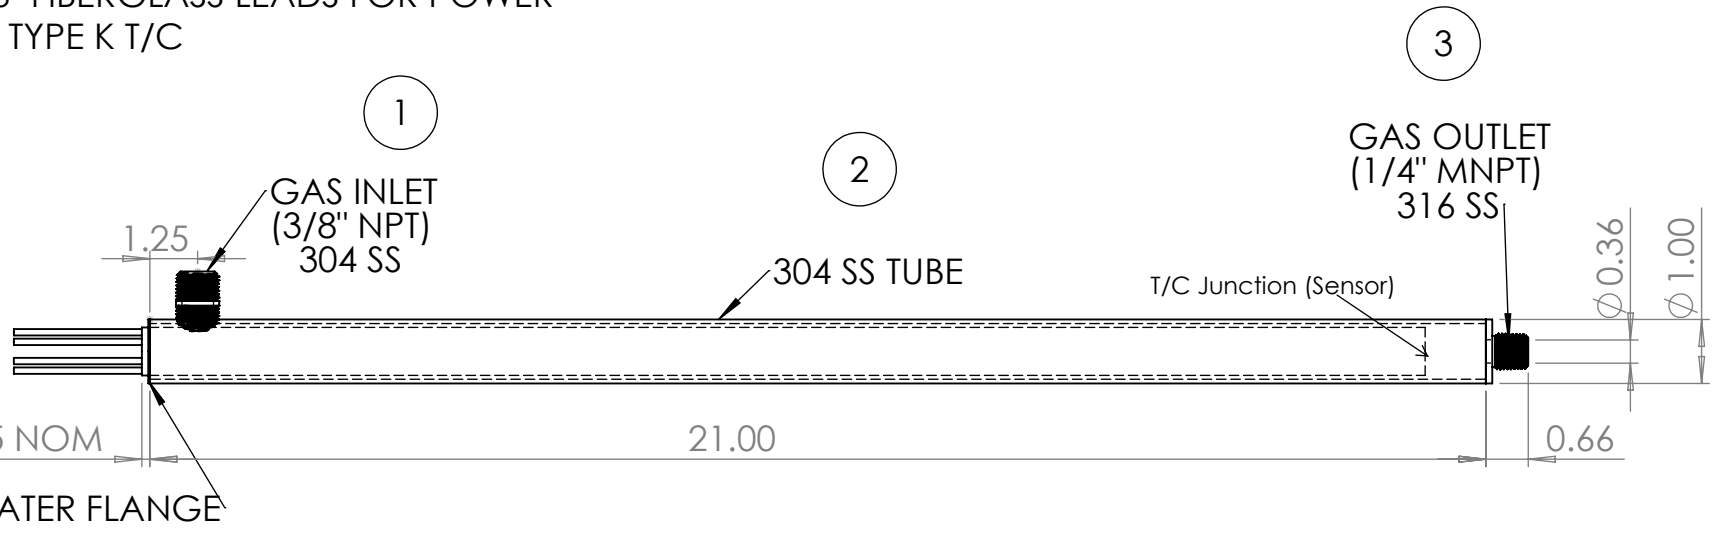

NOTES

- 1. THIS DRAWING IS FOR REF. ONLY
- 2. HEATER: 1,650W(+5%-10%), 120V
- 3. MUST NOT POWER WITHOUT AIR FLOW-MAX 800C TEMP
- 4. ON INITIAL START UP, START WITH LOWER VOLTAGE, E.G: 50%, RATED UNTIL OPTIMAL PERFORMANCE IS REACHED
- 5. HEATER MUST BE ADEQUATELY INSULATED

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BCE INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BCE INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	BCE		
DIMENSIONS ARE IN INCHES		DRAWN	A.M		TITLE: MINI CLEAN FLOW HEATER 1650W, 120V	
TOLERANCES:		CHECKED	DON S.			
FRACTIONAL ±		ENG APPR.				
ANGULAR: MACH ± BEND ±		MFG APPR.				
TWO PLACE DECIMAL ± .01		Q.A.				
THREE PLACE DECIMAL ± .005		COMMENTS:				
INTERPRET GEOMETRIC TOLERANCING PER:				SIZE	DWG. NO.	REV
MATERIAL				A	BCE10446	1
FINISH				SCALE: NTS		WEIGHT: N/A
SS304 SHEATH				SHEET 1 OF 1		
DO NOT SCALE DRAWING						