

4

3

2



1

B

B

A

A

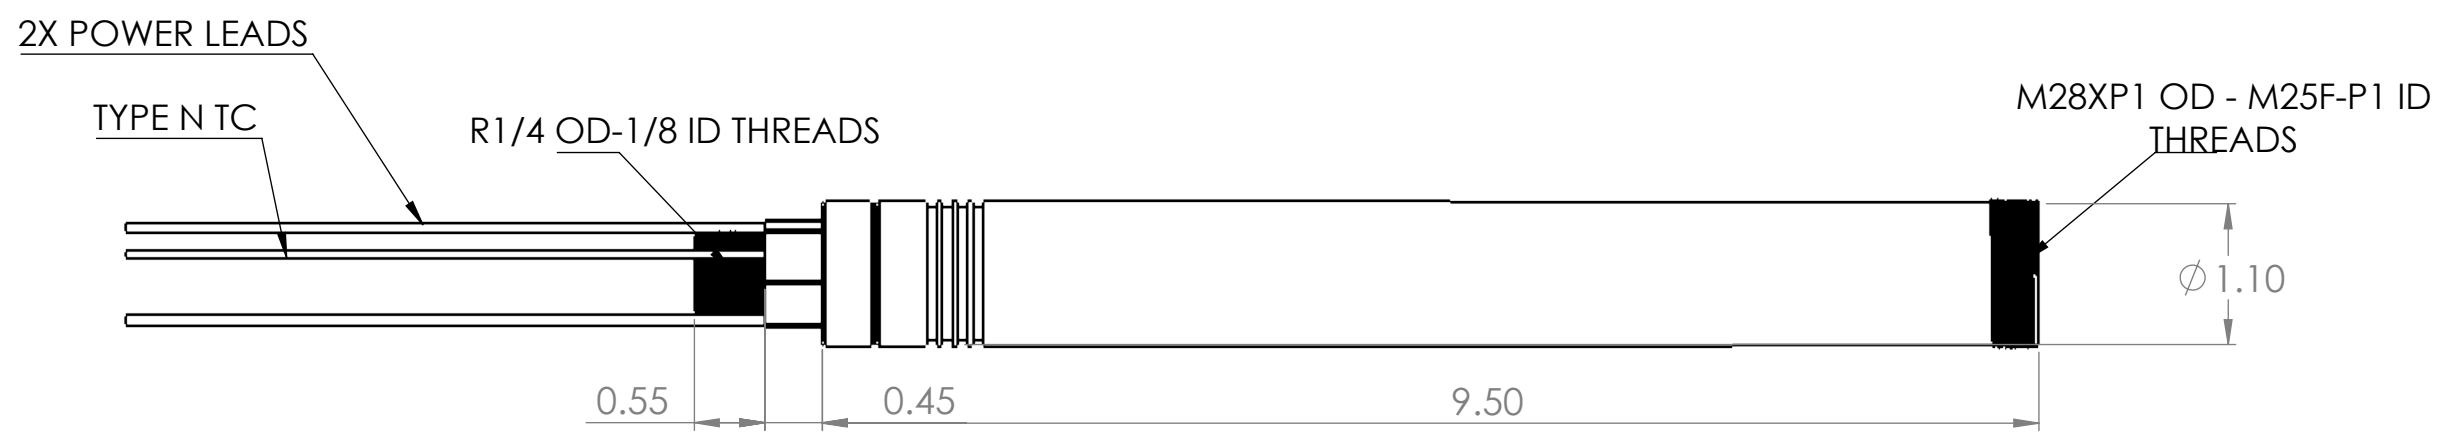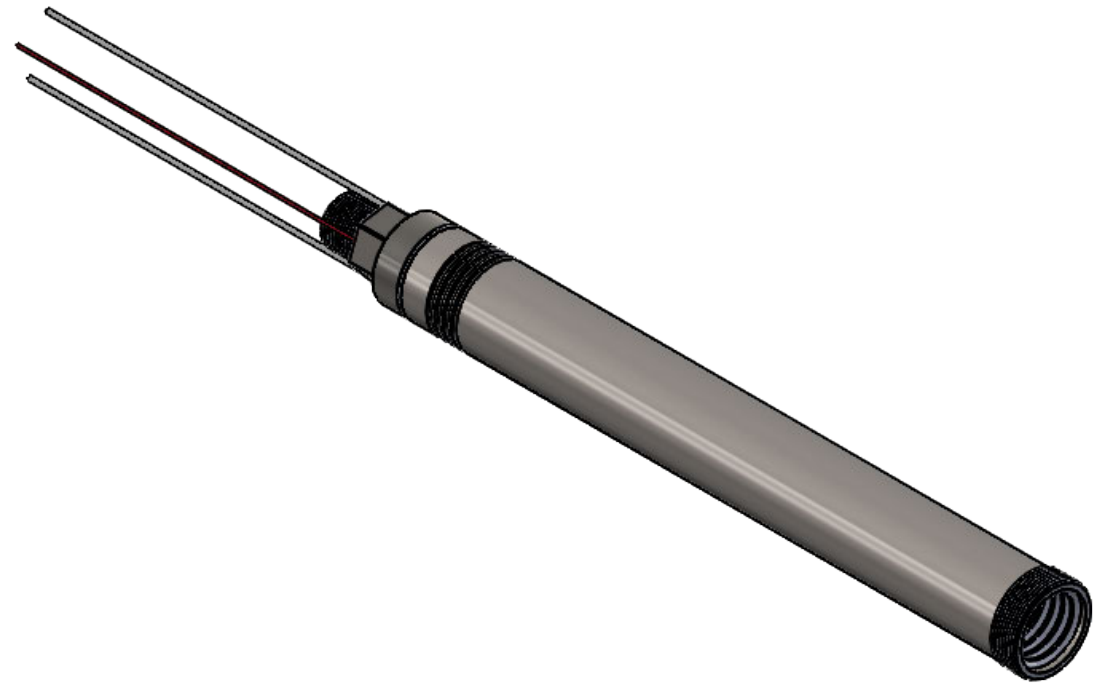

NOTES

1. HEATER SPECS: 240V, 9KW OR 120V, 2.25KW, 6.4-OHM
2. **MAXIMUM INTERNAL ELEMENT TEMP: 1,100C**
3. **SERVICE LIFE AT MAXIMUM INTERNAL TEMP OF 1,100C (SEE BCE LIFE VS TEMP CHART)**
4. TYPICAL FLOW RANGE: 40 TO 500 L/MIN
5. PRESSURE: CONSULT BCE OR REVIEW APPROPRIATE CHART (B23PS SERIES)
6. ADAPTERS AVAILABLE FOR THREADS LISTED ABOVE

The information given herein is based on data believed to be accurate, but BCE makes no expressed or implied warranties as to its accuracy and assumes no liability arising out of its use by others. This information does not constitute a license to use or infringe on any patents

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELILOVE COMPANY ENGINEERS (BCE). ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELILOVE COMPANY ENGINEERS (BCE) IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		BCE	
DIMENSIONS ARE IN INCHES		TITLE:	
TOLERANCES:		9kW 240 VOLT AIR HEATER	
FRACTIONAL ±1/32		2.2KW 120VOLT	
ANGULAR: MACH ± 1.0 BEND ±2.0		SIZE	DWG. NO.
TWO PLACE DECIMAL ±0.01		B	BCE10735
THREE PLACE DECIMAL ±0.005		SCALE:NTS	SHEET 1 OF 1
INTERPRET GEOMETRIC TOLERANCING PER:		REV	-
MATERIAL			
304SS SHELL -KANTHAL INTERNAL WIRE			
FINISH			
N/A			
DO NOT SCALE DRAWING			

4

3

2

1