

4


3

2

1

B

B

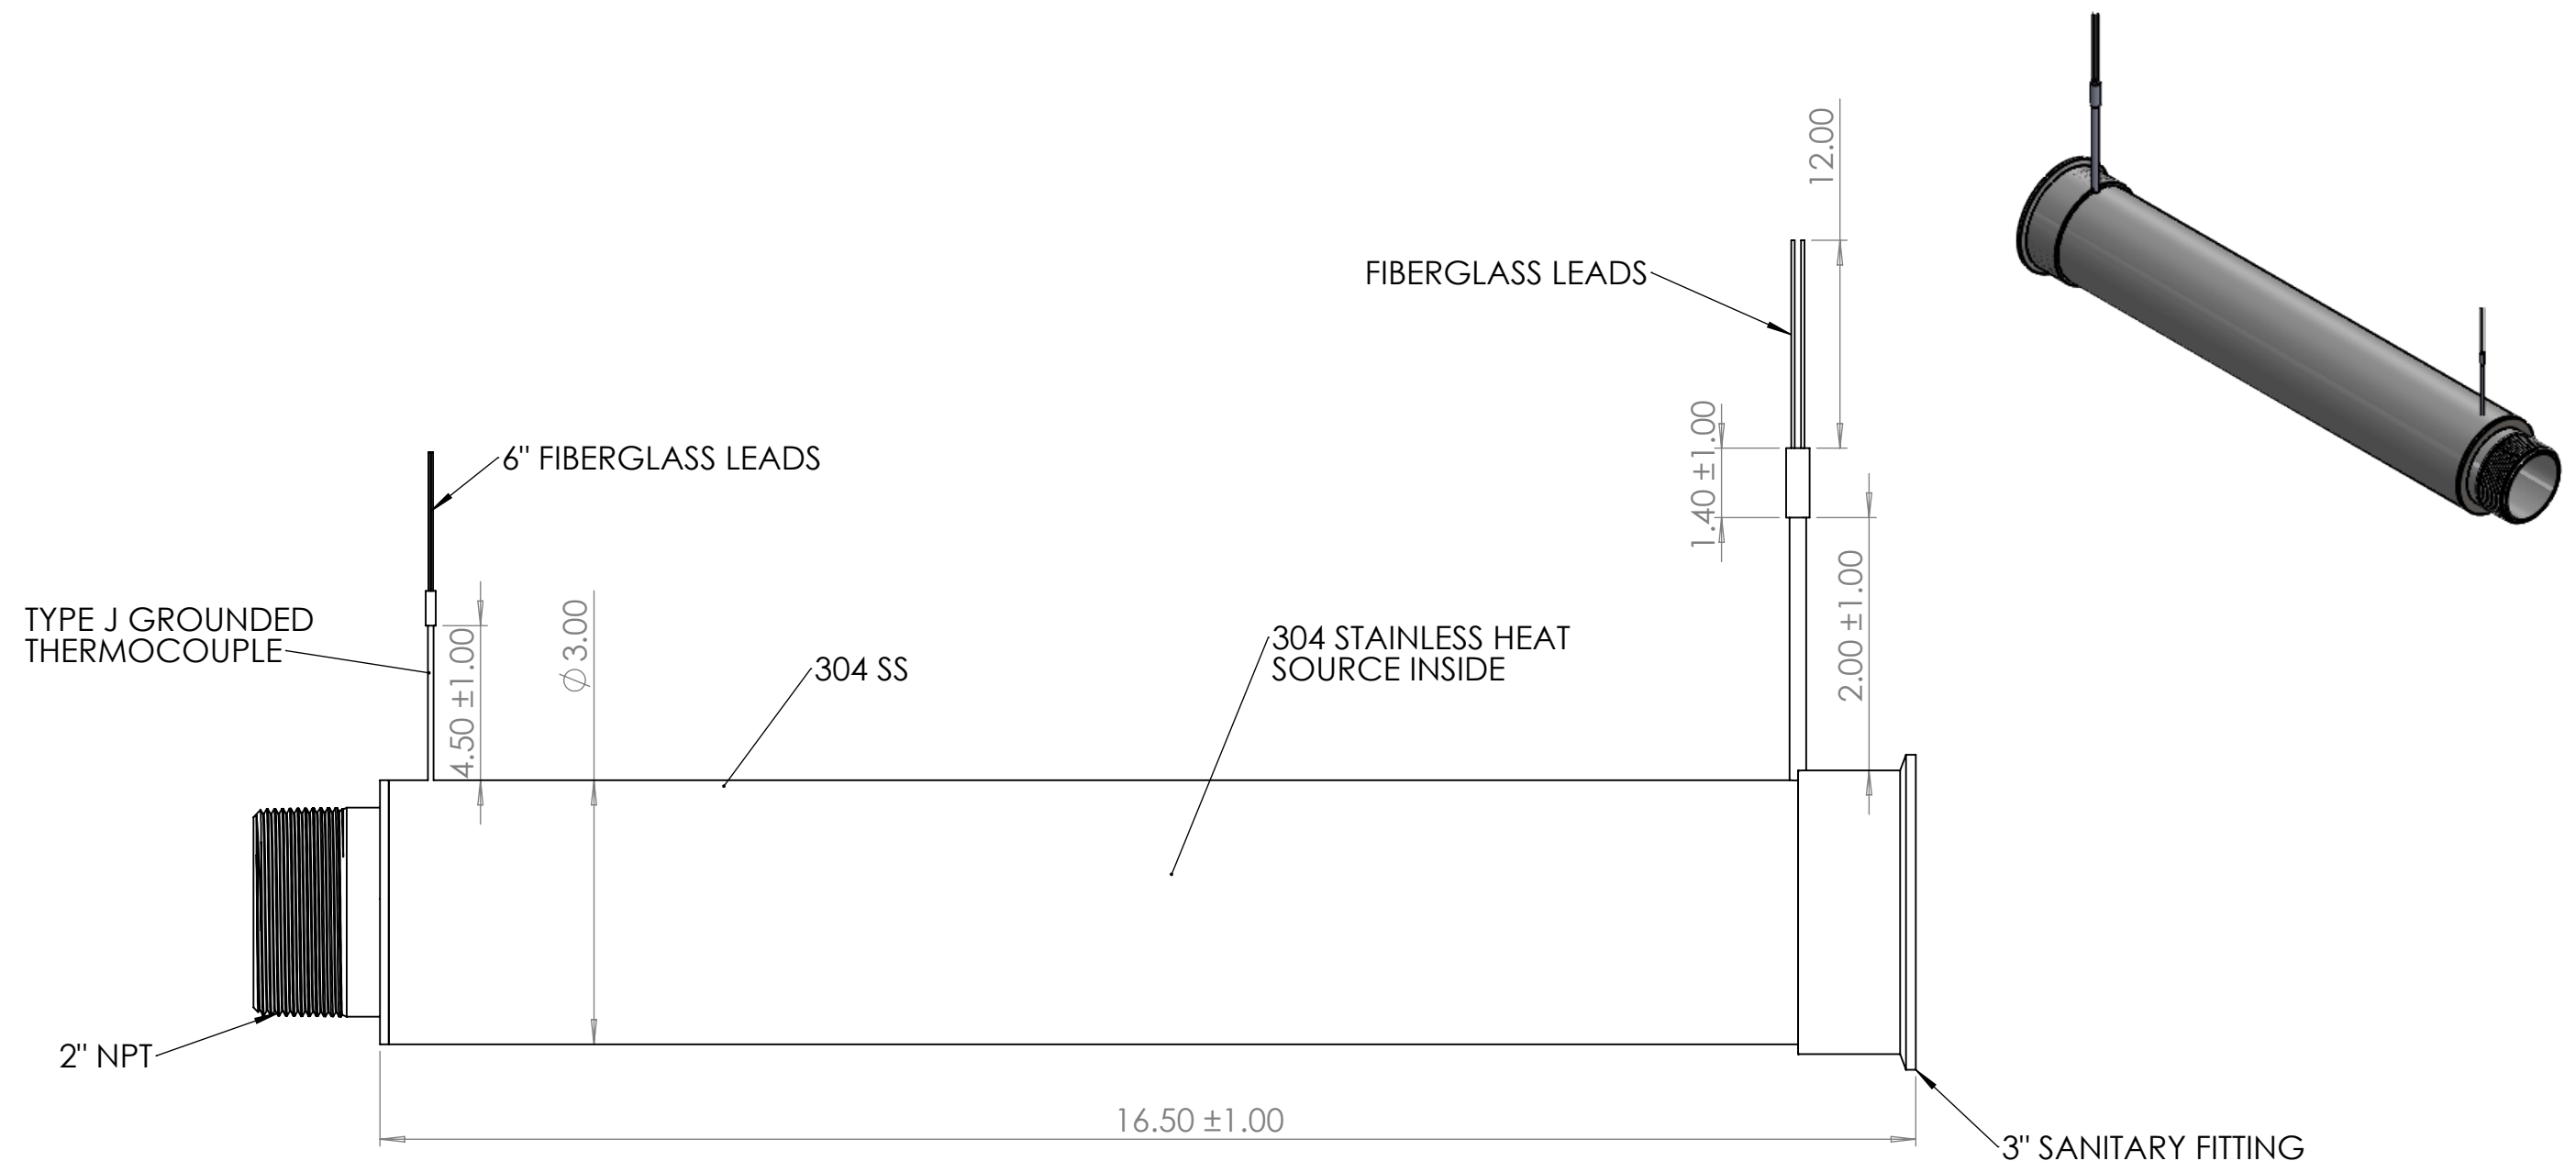

A

A

NOTES:

1. ELECTRICAL: 7,000 WATTS ($\pm 10\%$), 480 VOLTS
2. TYPE J GROUNDED THERMOCOUPLE PROBE IN FLOW PATH
3. DO NOT RUN WITHOUT PROPER MEDIUM FLOW
4. PRESSURE TESTED UP TO 90PSI AT 20-25C
5. CHEMICALLY CLEANED WITH ISO ALCOHOL

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELILOVE CO. ENGINEERS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELILOVE CO. ENGINEERS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	BCE
DIMENSIONS ARE IN INCHES		DRAWN	A.M	
TOLERANCES:		CHECKED		
FRACTIONAL \pm		ENG APPR.		
ANGULAR: MACH \pm BEND \pm		MFG APPR.		
TWO PLACE DECIMAL $\pm .020$		Q.A.		TITLE:
THREE PLACE DECIMAL $\pm .005$		COMMENTS:		MINI CLEAN FLOW
INTERPRET GEOMETRIC TOLERANCING PER:	MATERIAL	THIS DRAWING IS FOR REFERENCE ONLY.		HI-WATT
SEE DWG	FINISH	FINAL PRODUCT MAY DIFFER.		SIZE DWG. NO. REV
SEE DWG	DO NOT SCALE DRAWING			B BCE11139 -
				SCALE: NTS WEIGHT: N/A SHEET 1 OF 1

4

3

2

1