

8

7

6

5

4

3

2

1

D

D

C


C

B

B

A

A

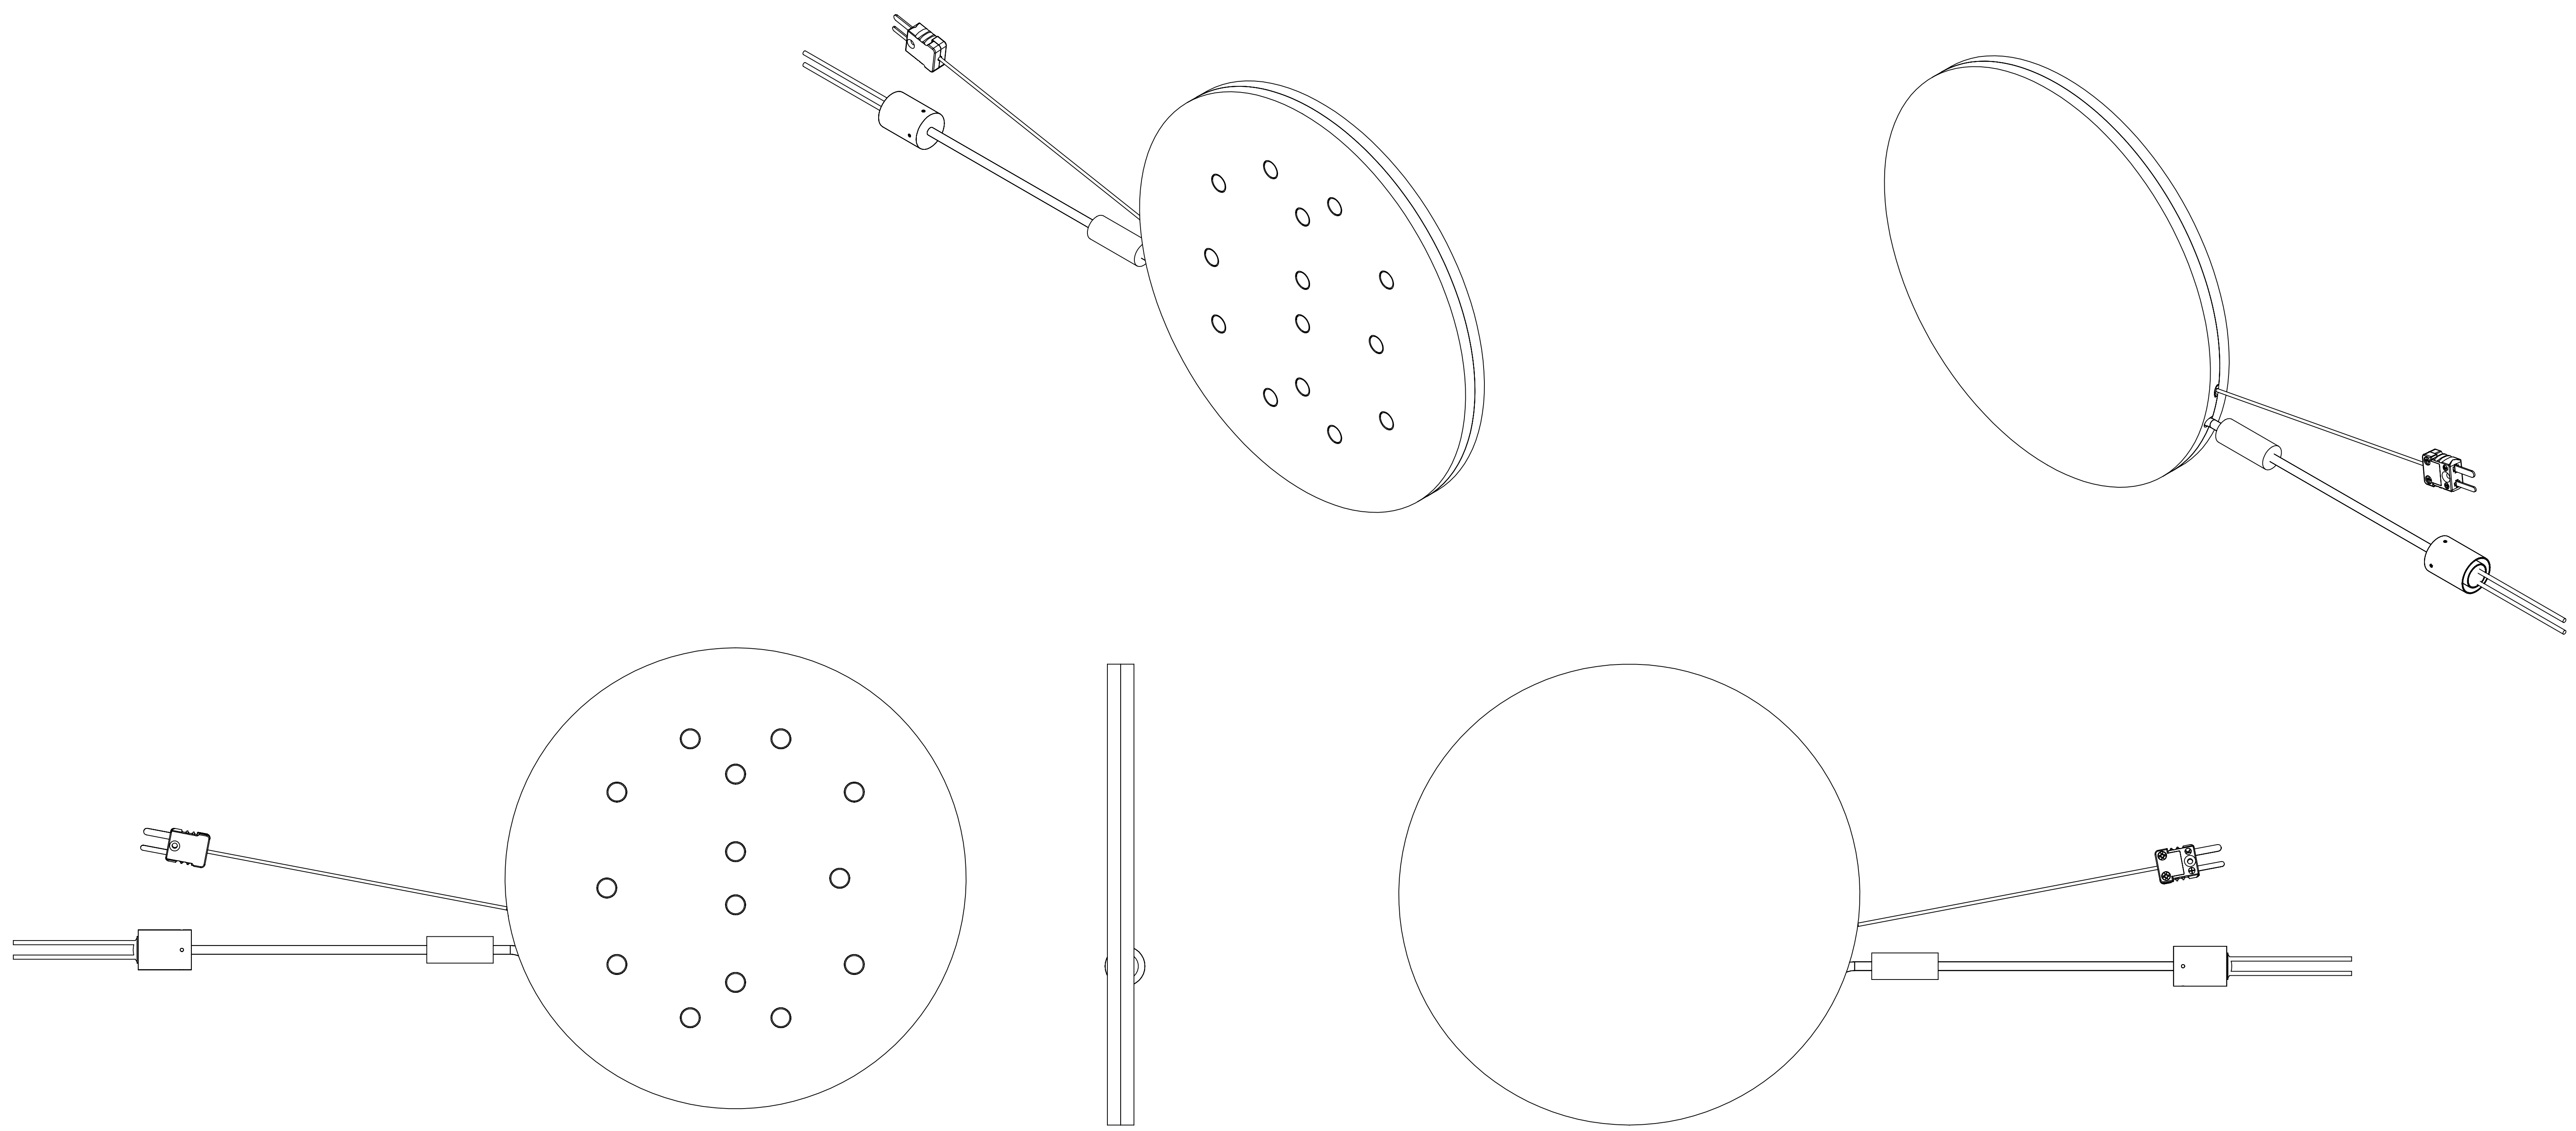

NOTES:

- 1. ELECTRICAL: 2850 WATT(+/- 10%) 240 VOLTS -16" FIBERGLASS LEADS
- 2. STAINLESS STEEL 304 MAIN BODY CONSTRUCTION.
- 3. **CAN BE, WITH FLANGE,** HE LEAK TESTED TO 1×10^{-5} ATM.CC/SEC
- 4. CHAMFERED SEAMS, 14X POSITIONING PEGS TIG/LASER WELDED FOR SEAL/STRUCTURAL INTEGRITY.
- 5. BCE TO CHEMICALLY CLEAN WITH IPA, BAG & TAG WITH PN.
- 6. ASSEMBLY TO BE POWERED UP & RAMPED IN ATMOSPHERE AT BCE PRIOR TO SHIPMENT. DISCOLORATION MAY BE PRESENT.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BCE/DFG.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BCE/DFG IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	21060 Corsair Blvd Hayward, CA 94545
DIMENSIONS ARE IN INCHES		DRAWN	AJM	
TOLERANCES:		CHECKED	D.S	TITLE:
FRACTIONAL: ±		ENG APPR.	AJM	HI TEMP HEATER PUCK
ANGULAR: MACH ± BEND ±		MFG APPR.		200 mm
TWO PLACE DECIMAL ±0.015		Q.A.		SIZE DWG. NO.
THREE PLACE DECIMAL ±0.007		COMMENTS:		D BCE11424
INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL				REV
FINISH SEE NOTES				-
NEXT ASSY	USED ON	APPLICATION	DO NOT SCALE DRAWING	SCALE: NTS WEIGHT: SHEET 1 OF 1

8

7

6

5

4

3

2

1